



Asus S500 USB, Headphone, and SD card Port board replacement

Access and remove the left side USB Ports/Headphone Jack/ SD Card Slot.

Written By: Isaac Lemus



INTRODUCTION

Access and remove the left side USB Ports/Headphone Jack/ SD Card Slot.



TOOLS:


- [Phillips #1 Screwdriver](#) (1)
-

Step 1 — USB, Headphone, and SD card Ports




- Unscrew the 10 screws on the back cover

Step 2

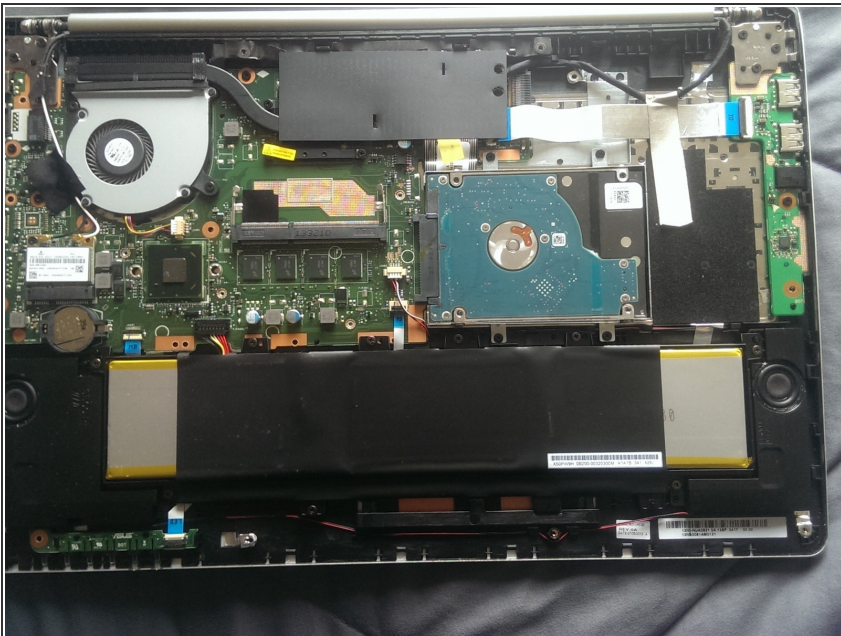

- Remove back cover (pry open along the grey/black line, they are held together by clips)

Step 3

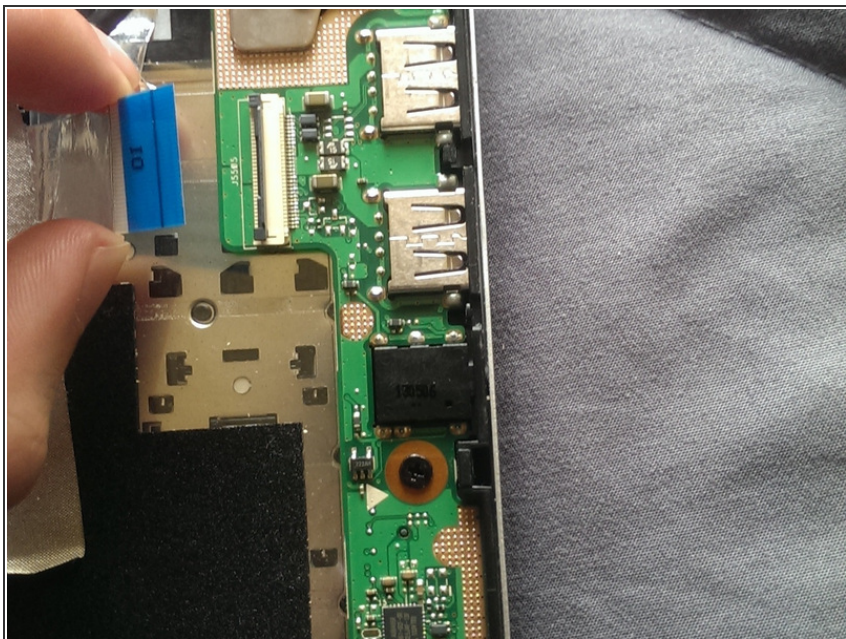

- Lift up tab and pull out the connector
- Unscrew the 4 screws
- Open up the screen (as you would to open up the laptop), and in doing so the metal piece will open up.
- Jostle the ports and remove the small board.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 02:37:34 AM.